Performer LED 150 Fresnel, DMX

USER MANUAL

Function test:

(1) This system has DMX on line/stand alone mode. DMX on line mode can link up other units and controlled by DMX controller. The stand alone has some functions, such as dimmer, program, sound control.

(2) When receiving the present signals under DMX mode or master/slave mode, the LED indicator of slave Will flash fast, while there is no signal, the address will flash.

(3) Under the DMX mode, if no signal receive, the menu displays" NO DMX SIGNAL", if the DMX signal receive, the menu return the status of the beginning.

(4) The units has the function of automatically savings present state, and under power off it will run the last mode when re-turn on.

Function introduction:

1） The outline diagram：

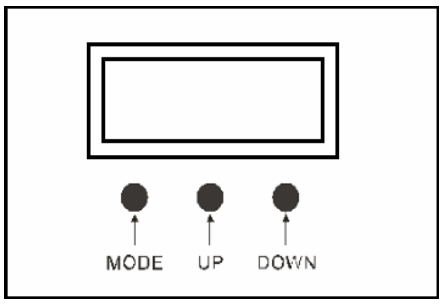

figure1

1 MODE ： select the work mode for LED ， specific function please see table 1

2.UP ： Positive selection DMX address and pattern speed ,dimmer light value

3 DOWM ： Reverse selection DMX address and pattern speed ,dimmer light value

	mode	**LCD display information**	**Operate instruction**
	Display mode	HIGHLITE V1.0	rolling mode boot
LCD Display mode	Light mode	DispPerm On	LCD backlight is on
	Turn automatically off mode	DispPerm Off	LCD after backlight running and turning automatically display for 10s,with the backlight off ,all keys aren't function Press any key for 3s and turn on the backlight state ,the key is function
DMX mode	1channel	DMX-1CH DMX ***	*** the digital arrange：1 to512 CH1 = dimmer light。
	2 channel	DMX-2CH DMX ***	*** the digital arrange：1 to 512 CH1 + CH2 = dimmer light
	3 channel	DMX-3CH DMX ***	*** the digital arrange：1 to 512 (specific see attached table 1) CH1 + CH2 = dimmer light CH3 = strobe
Manual mode or led send mode	Dimmer light	DimSet Dim ***	*** the digital arrange：0 to 255 0：off；255：on。
	Dimmer consumption 100w	Boost off	Press UP/DOWM key for 5s, can change the consumption of the luminaire Off －100w
	Dimmer consumption 150w	Boost on	Press UP/DOWM key for 5s, can change the consumption of the luminaire On －150w
	Time	Fix Hours ***** h	The luminaire is on unit：hour

	CH1(0 ~ 255)	CH2(0 ~ 255)	CH3(0 ~ 255)
function：	CH1+CH2(1~512)dimmer light		20level dimmer speed
	0：dimmer light turns off		0：strobe turns off

table1

Technical specifications:

Input voltage：	100～240V AC 47-63HZAC (230V 50HZ 0.76A)
consumption：：	MAX 165W
dimension(L×W×H):	L400 ×W250×H210 mm
weight:	6.56Kg
fuse:	3.15A / 250V